

KTM SMR 450 2018- (iLE-1-KIT)

Secure the bike on a stand.



Remove the seat.


Remove the side fairings.

Remove the fuel tank.



Connect the iLE-H-PWR Red wire to the Orange wire of the fuel injector connector.(Switched +12V)

Connect the iLE-H-PWR White wire to the Black/White wire of the fuel injector connector.(RPM)

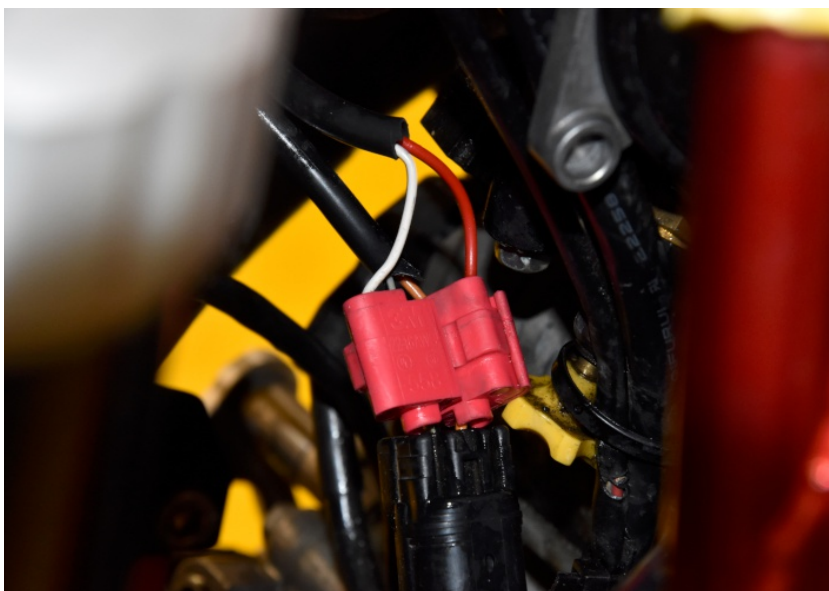

KTM SMR 450 2018- (iLE-1-KIT)


Connect the iLE Black wire terminal to the battery negative terminal.



Connect the Red, Black and White wires to the green terminal block as show on the photo.




Connect the green terminal block to the iLE modul.

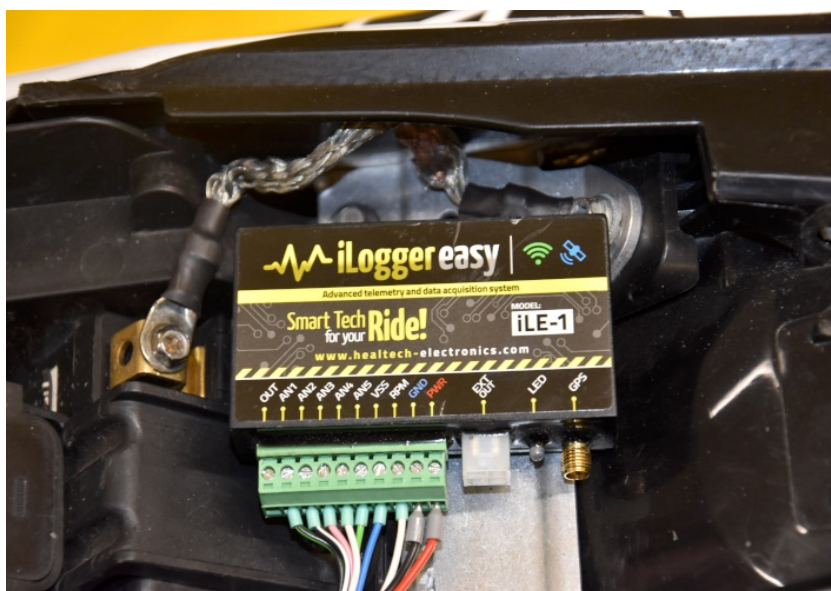

KTM SMR 450 2018- (iLE-1-KIT)

Optional:

Connect the iLE White wire to the Black/Yellow wire of the Engine coolant temperature sensor.

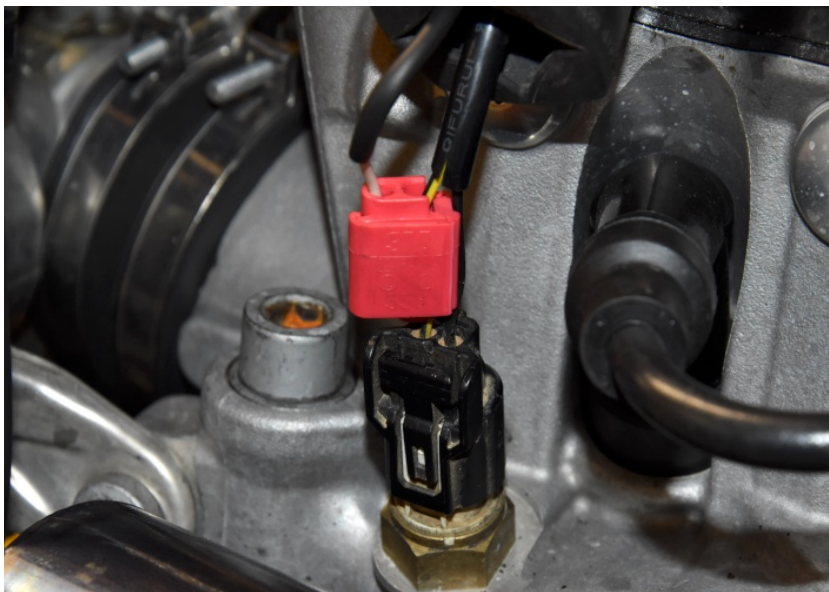

Optional:

Connect the iLE Pink wire to the Orange /Yellow wire of the Throttle position sensor.



Mount the GPS receiver.

Connect the GPS connector to the iLE module.



KTM SMR 450 2018- (iLE-1-KIT)

Typical position for the iLE module.

Secure the unit properly.

