

QuickShifter easy Supplementary Manual

Suzuki DL800 ABS TC 2023- (iQSE-W1 + QSH-F2A)

Secure the bike on a stand.




Remove the seat and the side fairings.

Remove the fuel tank.



Plug the QSH connectors in-line with the
fuel injector connectors.

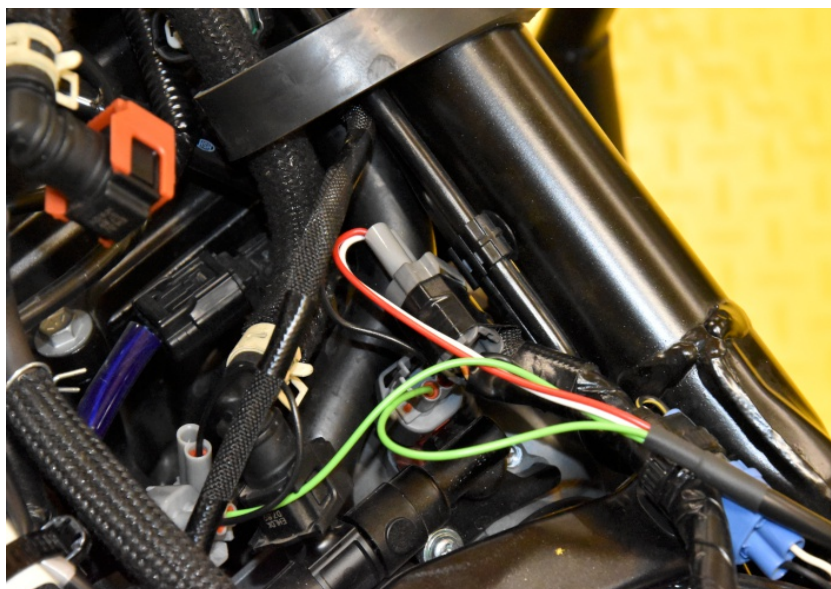

QuickShifter easy Supplementary Manual



Suzuki DL800 ABS TC 2023- (iQSE-W1 + QSH-F2A)

Connect the QSH Black wire terminal to the battery negative terminal.



Mount the QSE Sensor.

*(Replace the bolt with the one supplied.
Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench,
tighten the bolt until the shift arm is tight
on the gearbox shaft.)*



Typical position for the QuickShifter easy.

Secure the unit properly.

