

QuickShifter easy Supplementary Manual



Husqvarna FS450 2016- (iQSE-1 + QSH-F2F)

Secure the bike on a stand.




Locate the fuel injector connector under the fuel tank.



Connect the QSH connectors in-line with the injector connectors.

(Make sure the QSH plugs marked with RED square are connected, and leave the unmarked coupler unused. You may connect the male and female plugs of the unused pair together or isolate with tape.)

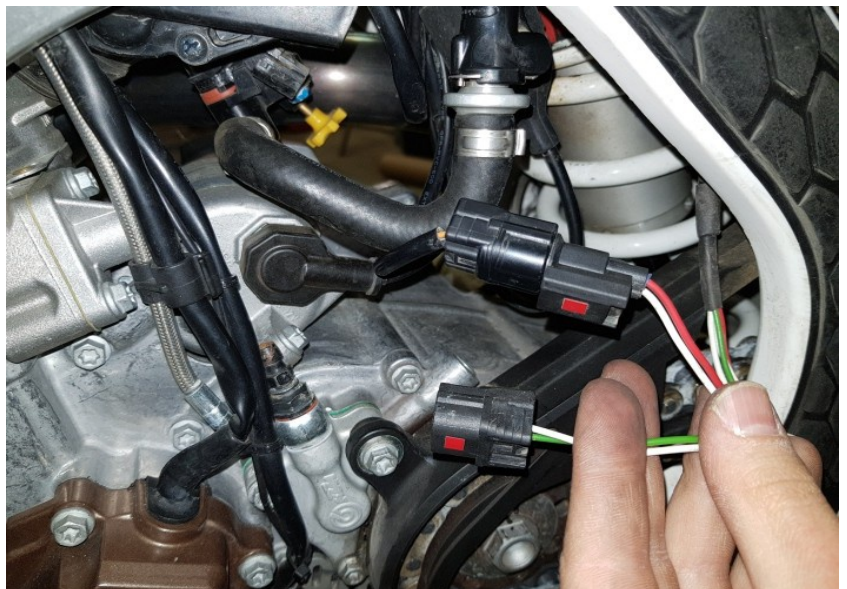

QuickShifter easy Supplementary Manual



Husqvarna FS450 2016- (iQSE-1 + QSH-F2F)

Connect the QSH Black wire terminal to the battery negative terminal.



Use the original bolt of the gearbox shaft, add the sensor and the original washer exactly as shown in this photo.



Mount the QSE sensor.

(Tighten the bolt in this position by about 6 Nm. If you do not have a torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



QuickShifter easy Supplementary Manual



Husqvarna FS450 2016- (iQSE-1 + QSH-F2F)

Typical position for the QuickShifter easy.

Secure the unit properly.

