

Kawasaki ER-6N 2006-2008 (iQSE-1 + QSH-P2B)


Remove the seat.



Remove the tank covers.



Lift up or remove the fuel tank.

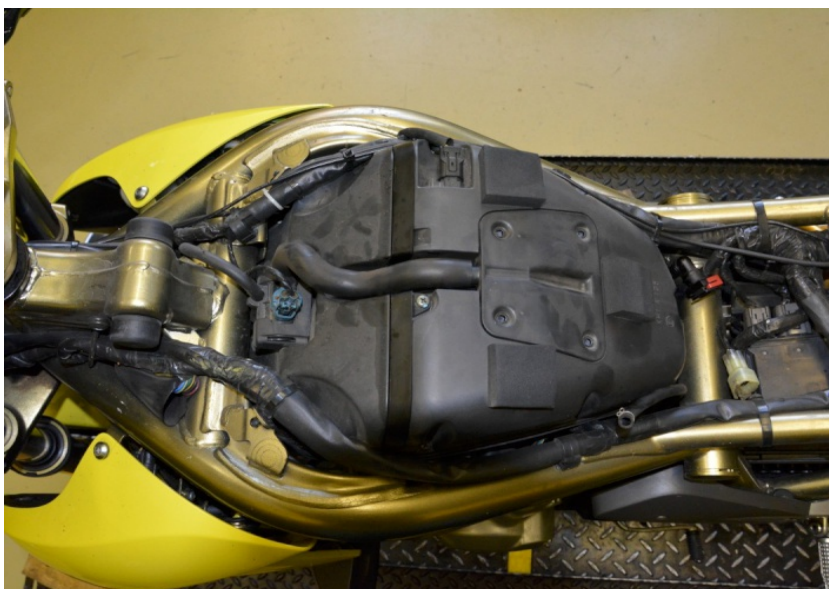

QuickShifter easy Supplementary Manual



Kawasaki ER-6N 2006-2008 (iQSE-1 + QSH-P2B)

Plug the QSH connectors in-line with the ignition coil connectors.

(Black, 2-pole connectors below the airbox)




Connect the QSH Black wire terminal to the chassis ground.



Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)

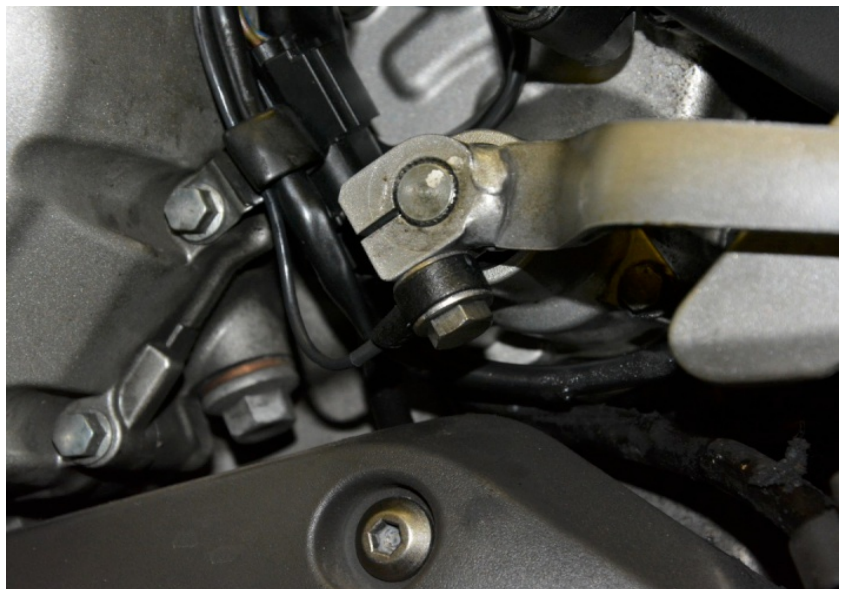

QuickShifter easy Supplementary Manual



Kawasaki ER-6N 2006-2008 (iQSE-1 + QSH-P2B)

Typical position for the QuickShifter easy.

Secure the unit properly.

