

# QuickShifter easy Supplementary Manual

## Kawasaki ZX-6R Ninja 2009-2012 (iQSE-1 + QSH-P4A)

Remove the black frame covers below  
the fuel tank.


Remove the main seat.



Remove or lift up the fuel tank.



Remove the airbox.

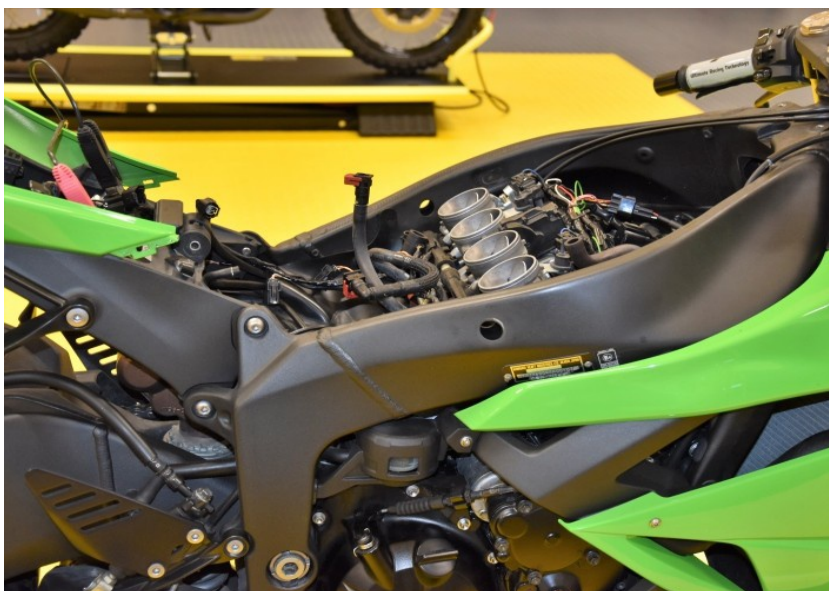




# QuickShifter easy Supplementary Manual



## Kawasaki ZX-6R Ninja 2009-2012 (iQSE-1 + QSH-P4A)

Plug the QSH connectors in-line with the ignition coil connectors.

*(Black, 2-pole connectors below the airbox)*

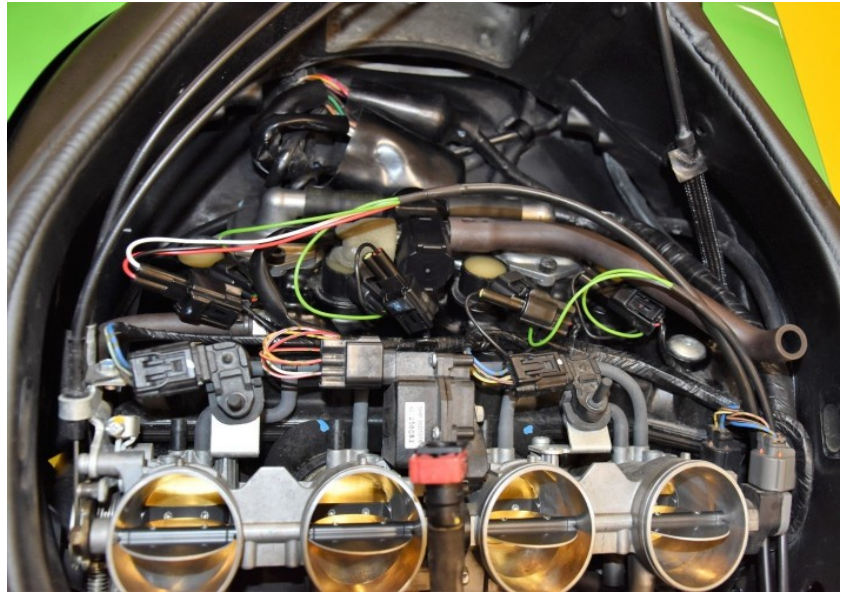


Connect the QSH Black wire terminal to the chassis ground.



Mount the QSE sensor.

*(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)*

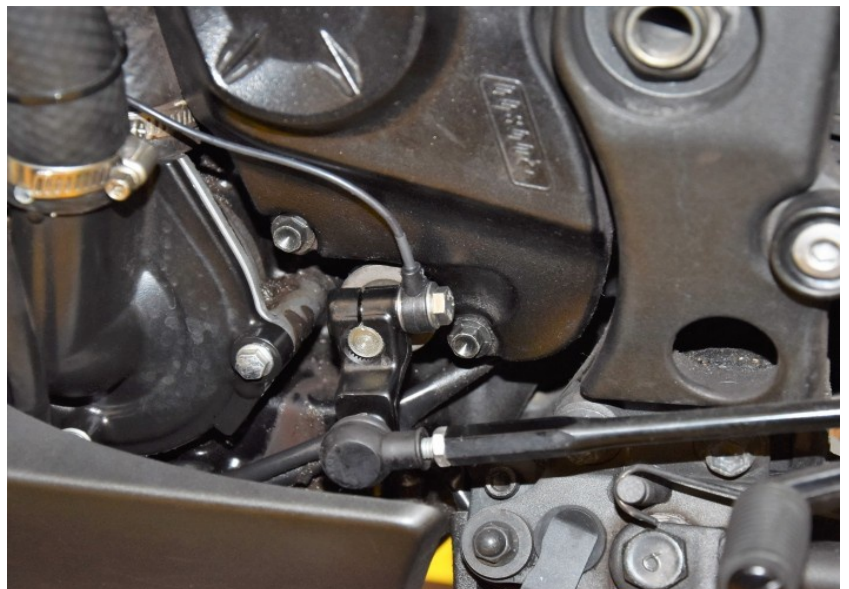

# QuickShifter easy Supplementary Manual



## Kawasaki ZX-6R Ninja 2009-2012 (iQSE-1 + QSH-P4A)

Typical position for the QuickShifter easy.

Secure the unit properly.

