

QuickShifter easy Supplementary Manual

Yamaha MT-09 Tracer / FJ-09 2015- (iQSE-1 + QSH-P4A)

Remove the seats and the fairings.




Remove the fuel tank and the airbox.



Plug the QSH connectors in-line with the
ignition coil connectors.

(Black, 2-pole connectors below the airbox)

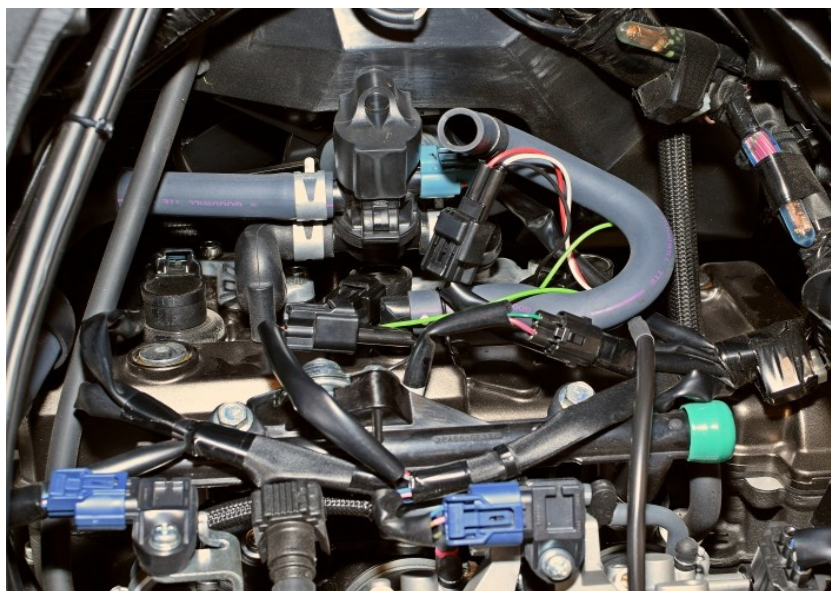

QuickShifter easy Supplementary Manual




Yamaha MT-09 Tracer / FJ-09 2015- (iQSE-1 + QSH-P4A)

Connect the QSH Black wire terminal to the chassis ground.



Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)

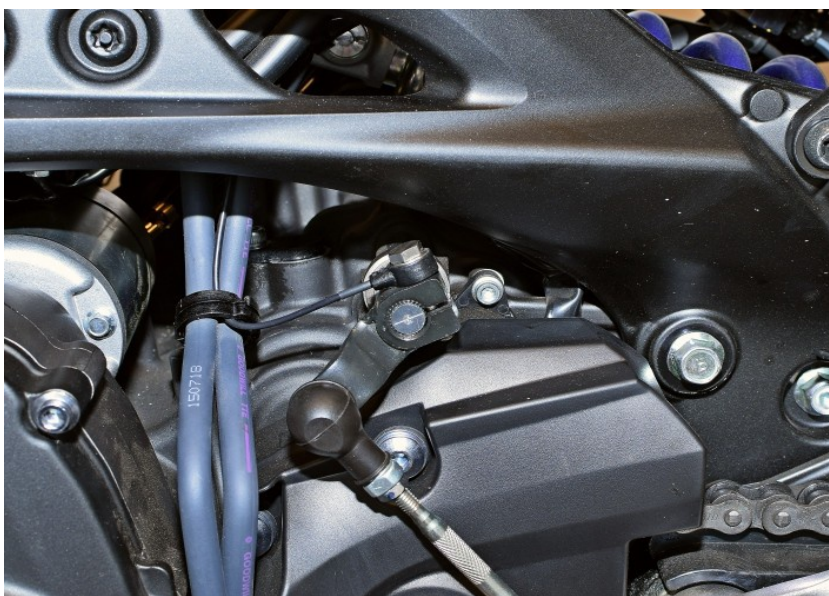

Typical position for the QuickShifter easy.

Secure the unit properly.

