

Triumph Tiger Sport 2013- (iQSE-1 + QSH-P4B)

Remove the seat.



Remove the fuel tank covers and the side fairings.



Remove the fuel tank and the airbox.




QuickShifter easy Supplementary Manual




Triumph Tiger Sport 2013- (iQSE-1 + QSH-P4B)

Plug the QSH connectors in-line with the ignition coil connectors.

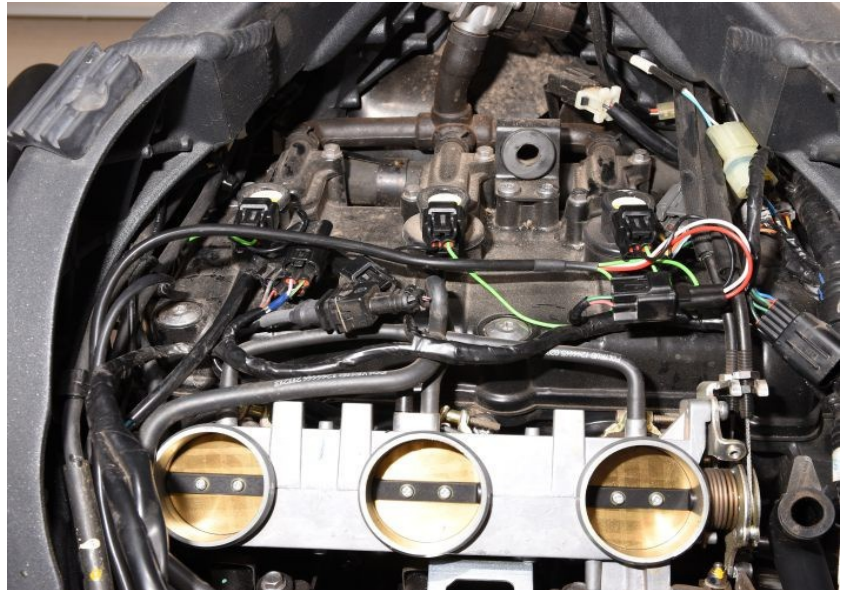

Connect the QSH Black wire terminal to the chassis ground.

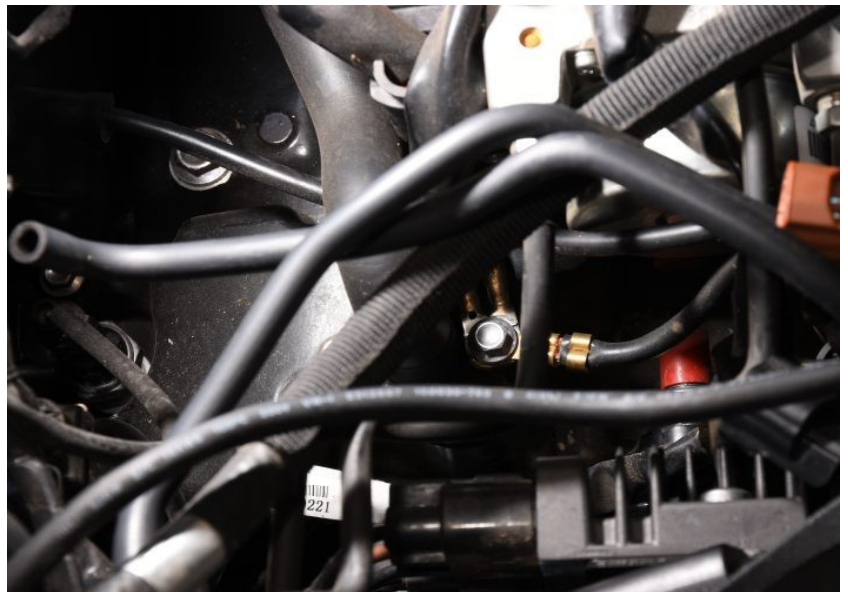

Mount the QSE sensor.

*(Replace the bolt with the one supplied.
Place the supplied washers at both sides of
the sensor. Tighten the bolt in this position
by about 6 Nm. If you do not have torque
wrench, tighten the bolt until the shift arm
is tight on the gearbox shaft.)*



QuickShifter easy Supplementary Manual



Triumph Tiger Sport 2013- (iQSE-1 + QSH-P4B)

Typical position for the QuickShifter easy.

Secure the unit properly.

