

Aprilia Caponord 1200 2013- (iQSE-1 + QSH-P4H)

Remove the seats.



Remove the frame covers and the side fairings.




Remove the fuel tank.



QuickShifter easy Supplementary Manual

Aprilia Caponord 1200 2013- (iQSE-1 + QSH-P4H)

Remove the airbox.

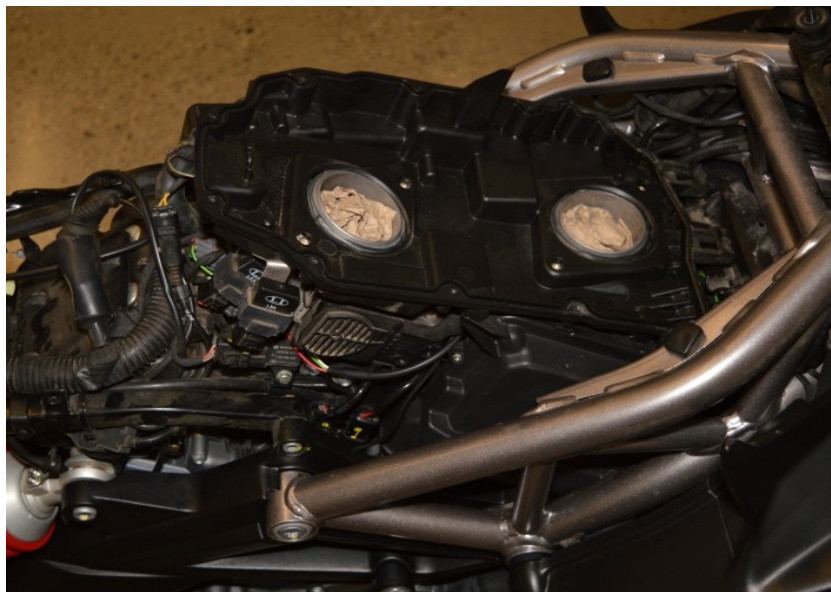


Connect the QSH connectors in-line with the ignition coil connectors on the left side.

(Black, 3-pole connectors)



Connect the QSH connectors in-line with the ignition coil connectors on the right side.

(Black, 3-pole connectors)

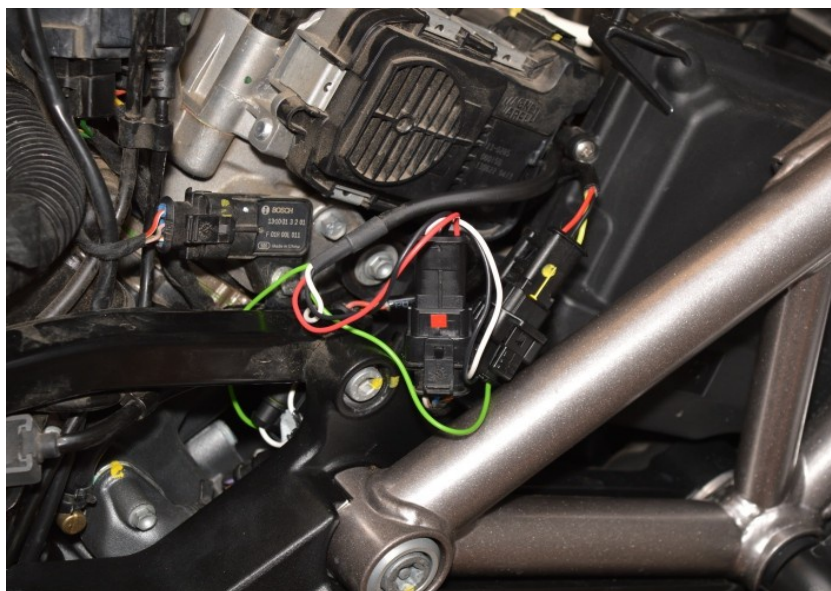

QuickShifter easy Supplementary Manual



Aprilia Caponord 1200 2013- (iQSE-1 + QSH-P4H)

Connect the QSH Black wire terminal to the chassis ground.



Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



Typical position for the QuickShifter easy.

Secure the unit properly.

