

QuickShifter easy Supplementary Manual

Honda CRF300L ABS 2021- (iQSE-W1 + QSX-F2A)

Secure the bike on a stand.



Remove the seat.

Remove the side fairings.

Remove the fuel tank.



Locate the fuel injector connectors under
the fuel tank.

(Grey, 2-pole connectors)




QuickShifter easy Supplementary Manual




Honda CRF300L ABS 2021- (iQSE-W1 + QSX-F2A)

Connect the QSX connectors in-line with the fuel injector connectors.

(Make sure the QSX plugs marked with RED square are connected, and leave the other one coupler unused)

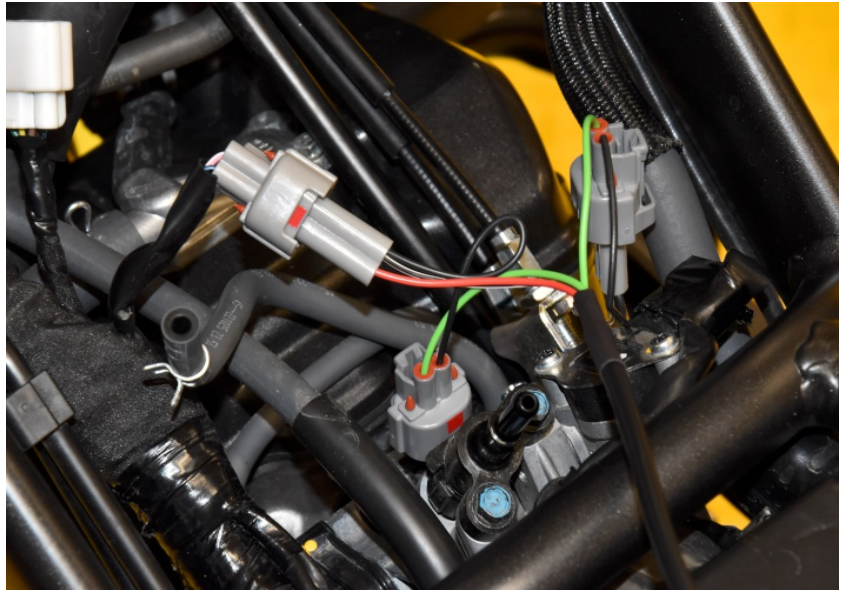

Connect the QSX Black wire terminal to the battery negative terminal.

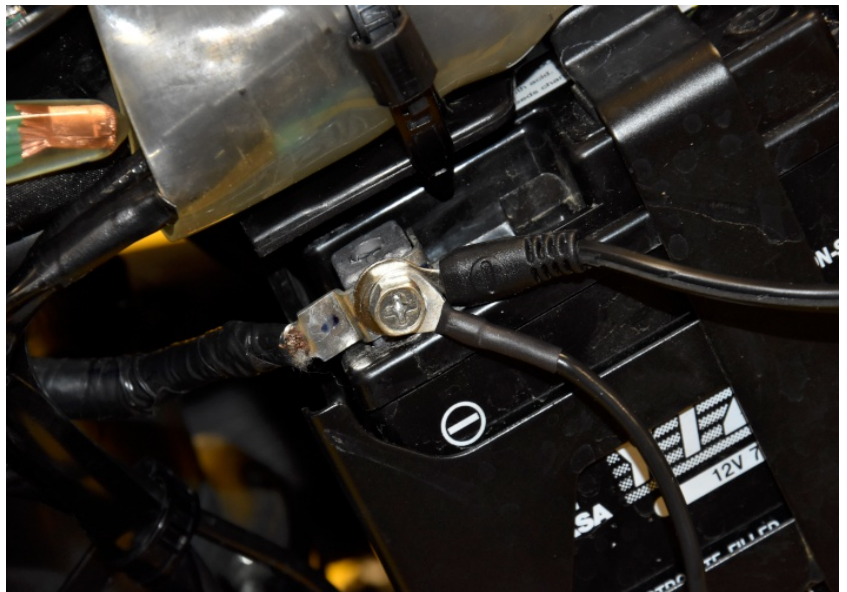

Mount the QSE sensor.

(Replace the bolt with the one supplied. Tighten the bolt in this position by about 6 Nm. If you do not have a torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



QuickShifter easy Supplementary Manual



Honda CRF300L ABS 2021- (iQSE-W1 + QSX-F2A)

Typical position for the QuickShifter easy.

Secure the unit properly.

