

QuickShifter easy Supplementary Manual



Suzuki DL1000 V-Strom 2014-2020 (iQSE-1 + QSX-F2A)

Remove the seat.

Remove the side fairings.



Remove the fuel tank.

Remove the airbox.



Plug the QSX connectors in-line with the
fuel injector connectors.

*(Brown and grey, 2-pole connectors bellow
the airbox)*



QuickShifter easy Supplementary Manual




Suzuki DL1000 V-Strom 2014-2020 (iQSE-1 + QSX-F2A)

Connect the QSX Black wire terminal to the chassis ground.



Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)

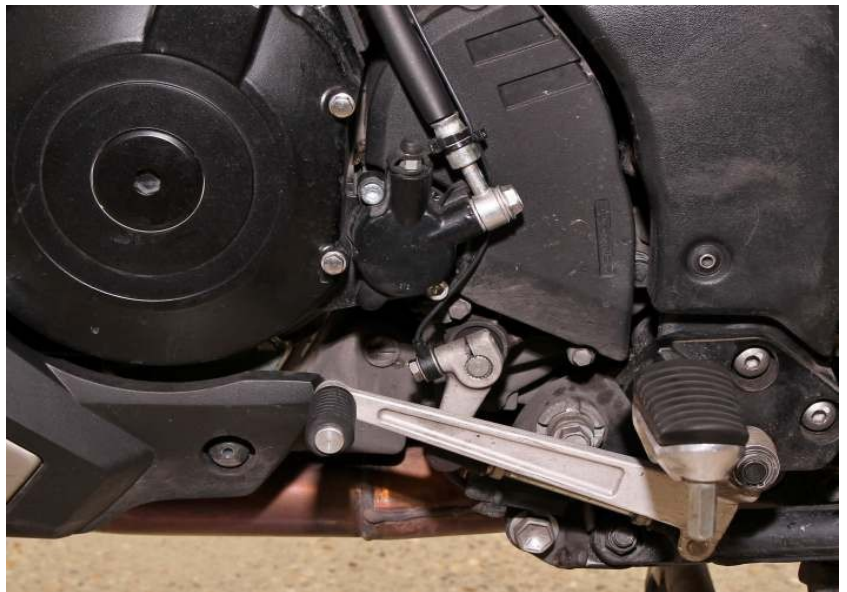

Typical position for the QuickShifter easy.

Secure the unit properly.

