

# SpeedoHealer CAN Supplementary Manual

## Aprilia RS457 ABS TC 2024- (SH-CAN)

Secure the bike on a stand.



Remove the seats.

Remove the plastic cover from the fuel tank.

Remove the fuel tank.



Locate the ABS connector under the fuel tank.



# SpeedoHealer CAN Supplementary Manual




## Aprilia RS457 ABS TC 2024- (SH-CAN)

Cut the Orange wire about 2,5cm (1") of the connector.

Connect the SH Green wire to the Orange wire end, which goes to the ABS module. Use a yellow butt connector.




Connect the SH Blue wire to the Orange wire end, which is at the wiring harness side. Use a yellow butt connector.

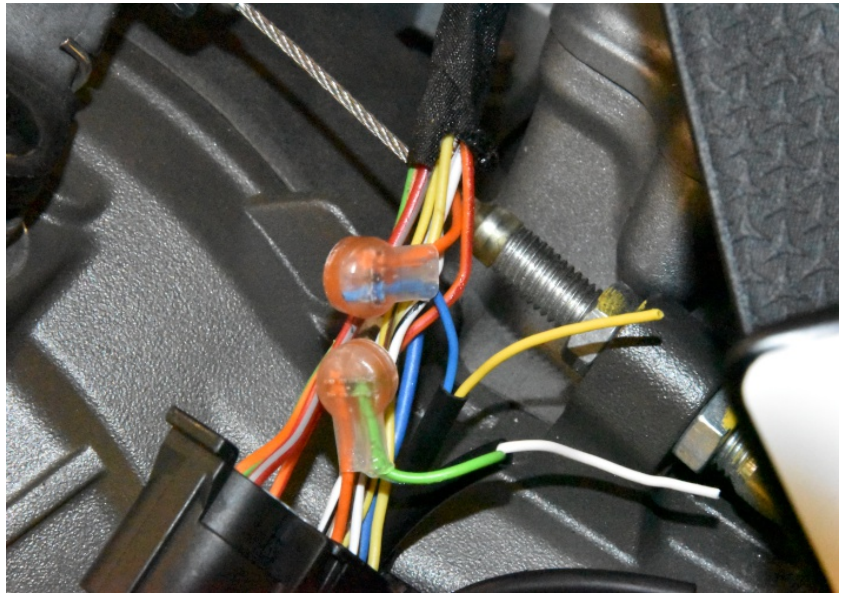

Cut the White/Black wire about 2,5cm (1") of the connector.

Connect the SH White wire to the White/Black wire end, which goes to the ABS module. Use a yellow butt connector.

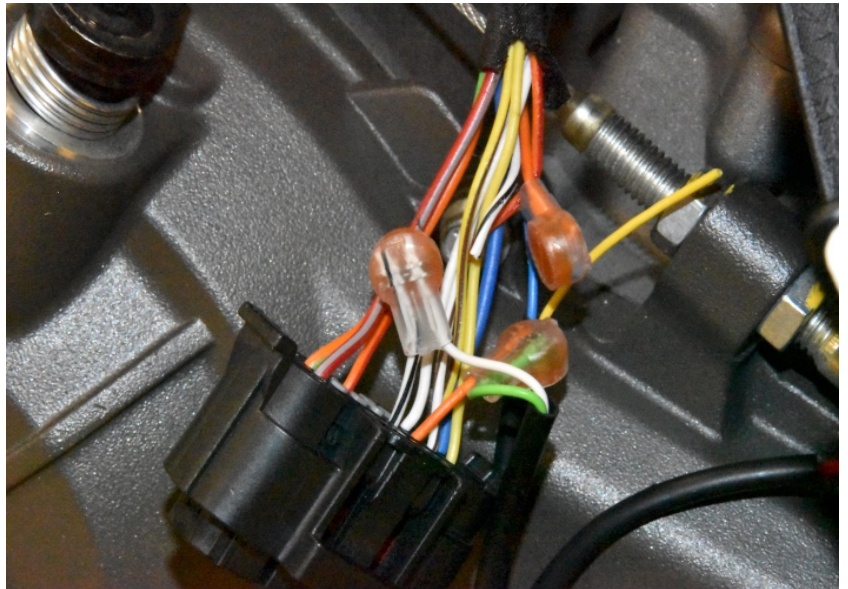

# SpeedoHealer CAN Supplementary Manual



## Aprilia RS457 ABS TC 2024- (SH-CAN)


Connect the SH Yellow wire to the White/Black wire end, which is at the wiring harness side. Use a yellow butt connector.



Splice the SH Red wire to the Orange/Red wire of the ABS connector. Use a red wire tap connector.



Splice the SH Black wire to the Blue wire of the ABS connector. Use a red wire tap connector.

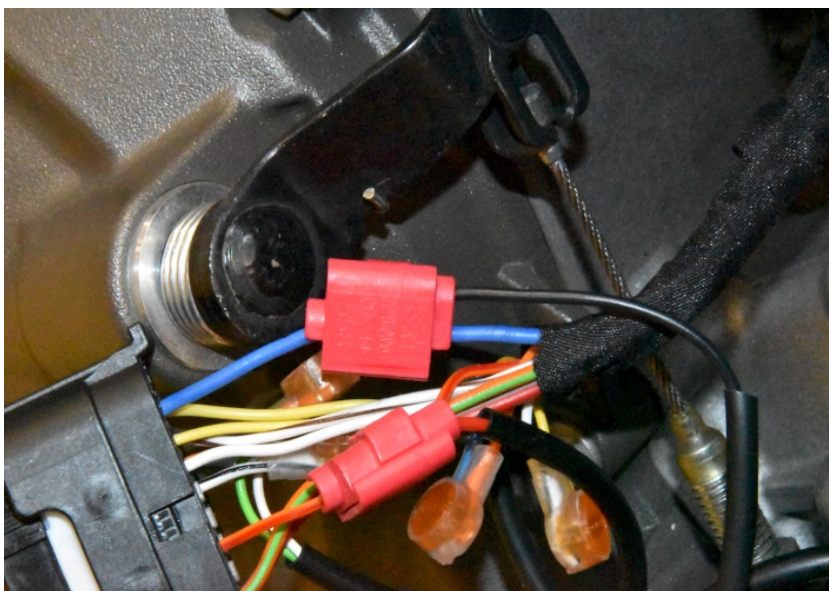

# SpeedoHealer CAN Supplementary Manual



## Aprilia RS457 ABS TC 2024- (SH-CAN)

Typical position for the SpeedoHealer CAN.

Secure the unit properly.

