

SpeedoHealer CAN Supplementary Manual

Moto Guzzi V100 ABS TC 2023- (SH-CAN)

Secure the bike on a stand.




Remove the seats.

Remove the plastic cover from the fuel tank.

Remove the fuel tank and the airbox.



Locate the ABS connector under the airbox.

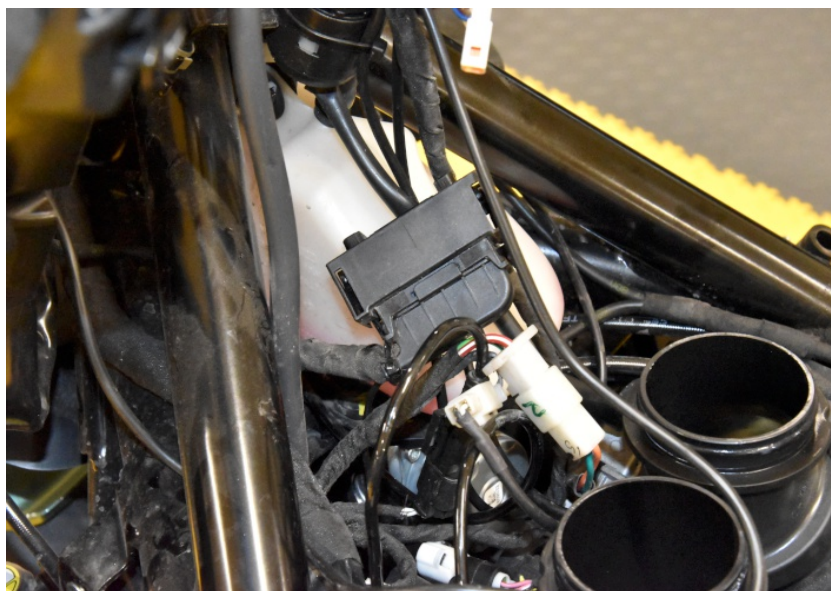

SpeedoHealer CAN Supplementary Manual




Moto Guzzi V100 ABS TC 2023- (SH-CAN)

Cut the Orange wire about 2,5cm (1") of the connector.

Connect the SH Green wire to the Orange wire end, which goes to the ABS module. Use a yellow butt connector.




Connect the SH Blue wire to the Orange wire end, which is at the wiring harness side. Use a yellow butt connector.

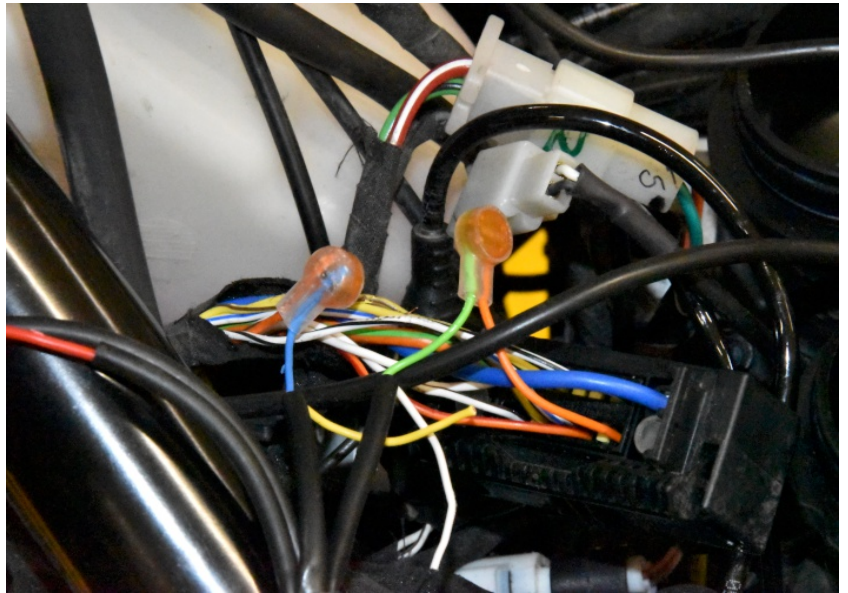

Cut the White/Black wire about 2,5cm (1") of the connector.

Connect the SH White wire to the White/Black wire end, which goes to the ABS module. Use a yellow butt connector.

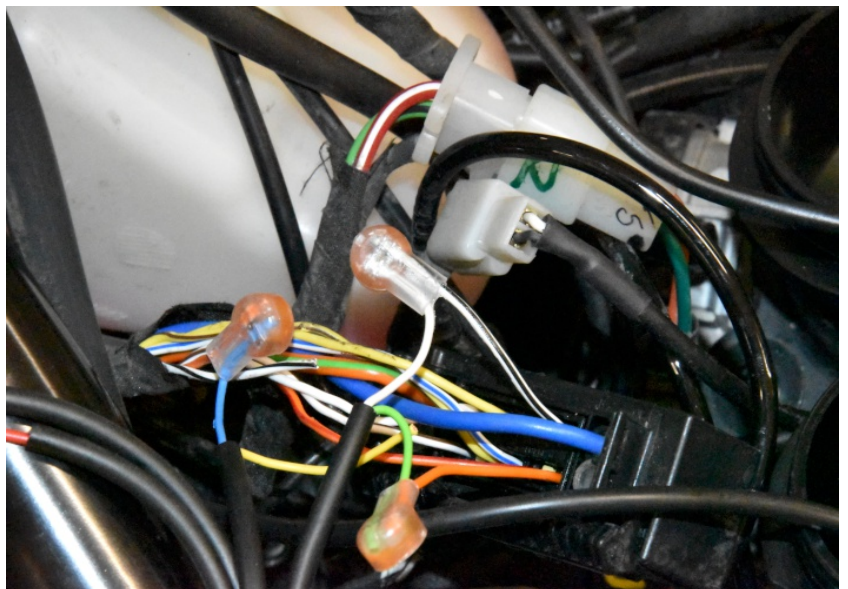

SpeedoHealer CAN Supplementary Manual



Moto Guzzi V100 ABS TC 2023- (SH-CAN)


Connect the SH Yellow wire to the White/Black wire end, which is at the wiring harness side. Use a yellow butt connector.



Splice the SH Red wire to the Orange/Red wire of the ABS connector. Use a red wire tap connector.



Splice the SH Black wire to the Blue wire of the grip heater connector. Use a red wire tap connector.

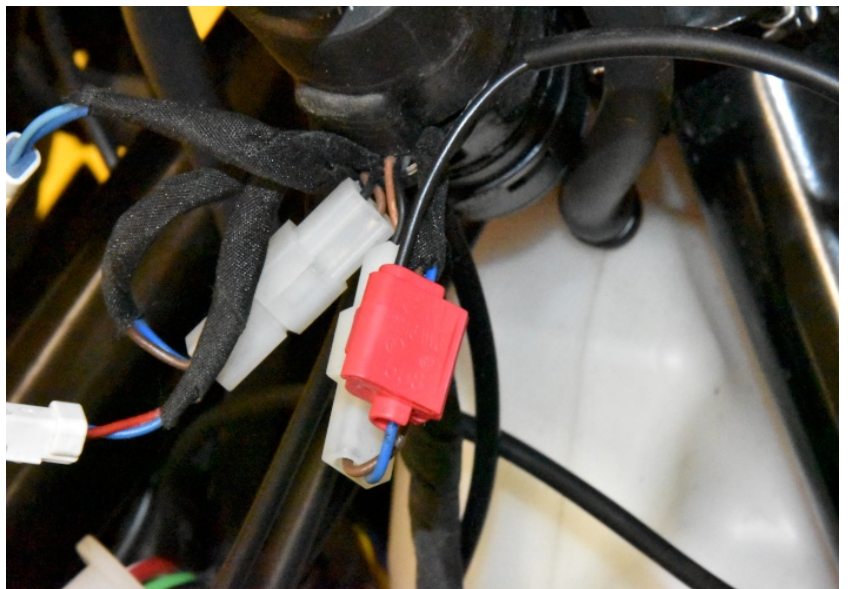

SpeedoHealer CAN Supplementary Manual



Moto Guzzi V100 ABS TC 2023- (SH-CAN)

Typical position for the SpeedoHealer CAN.

Secure the unit properly.

