

Suzuki GSX-8S ABS TC 2023- (SH-CAN)

Secure the bike on a stand.



Remove the seats.

Remove the side fairings from the fuel tank.

Remove the fuel tank.



Locate the dashboard connectors on the left side.






Suzuki GSX-8S ABS TC 2023- (SH-CAN)

Cut the Black wire about 2,5cm (1") of the connector.

Connect the SH Green wire to the Black wire end, which goes to the dashboard. Use a yellow butt connector.




Connect the SH Blue wire to the Black wire end, which is at the wiring harness side. Use a yellow butt connector.

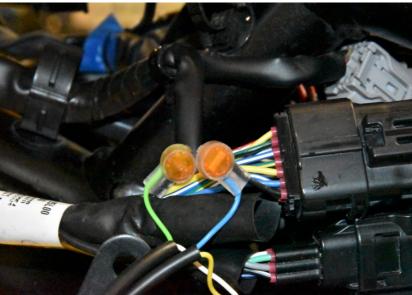

Cut the Blue wire about 2,5cm (1") of the connector.

Connect the SH White wire to the Blue wire end, which goes to the dashboard. Use a yellow butt connector.

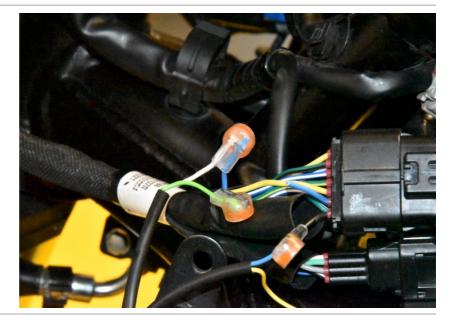




Suzuki GSX-8S ABS TC 2023- (SH-CAN)


Connect the SH Yellow wire to the Blue wire end, which is at the wiring harness side. Use a yellow butt connector.



Splice the SH Red wire to the White/Green wire of the dashboard connector. Use a red wire tap connector.

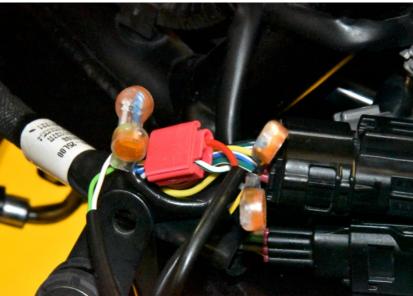

Splice the SH Black wire to the Black/White wire of the dashboard connector. Use a red wire tap connector.

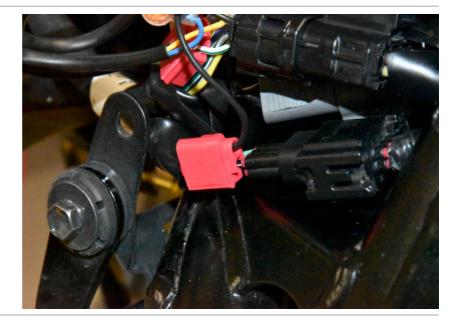



Suzuki GSX-8S ABS TC 2023- (SH-CAN)

Typical position for the SpeedoHealer CAN.

Secure the unit properly.

